



DESIGNED
IN ITALY



For over 35 years Jolly Safety Footwear has been a leading essential supplier of professional firefighting footwear throughout Europe. Recently, Jolly was selected as the preferred supplier of Firefighting & Rescue Footwear to the UK Collaborative Framework which is accessible to all Fire and Rescue Services across the United Kingdom.



A focus on introducing innovative materials, superior safety and premium comfort has made Jolly a market leader in the field of protective footwear for firefighters and a reference point for all professionals.

In 2019 Jolly partnered with Pac Fire to bring the most comfortable fire boots available on the market today to Australasia.

PRODUCT SPECIFICATIONS

Product Code	9300 GA <i>(please specify a size when ordering)</i>
Application	Wildland Firefighting Rescue
Sizes	UK Sizes 3.5 (EU36), 4 (EU37), 5 (EU38), 6 (EU39), 6.5 (EU40), 7 (EU41), 8 (EU42), 9 (EU43), 9.5 (EU44), 10 (EU45), 11 (EU46), 12 (EU47), 12.5 (EU48), 13 (EU49), 14 (EU50), 15 (EU51)
Certification	AS/NZS 4821:2014 EN 15090:2012 F2A HI CI AN SRC Category III P.P.E



SUPERLEGGARA

Superleggara has been designed for a wide range of applications.

It's AS/NZS 4821:2014 certification makes Superleggara suitable for Structural Firefighting. The compact and lightweight design means Superleggara is a comfortable option when in Wildland Firefighting and Rescue situations.

A. UPPER: 1.7 - 1.9mm full grain leather, black, water repellent treated, and microfiber inserts.

B. LINING: GORE® CROSSTECH®. Superior liquid penetration resistance, highly breathable, extremely durable and added protection against blood and bodily fluids (not pictured).

C. TOECAP: lightweight, asymmetric aluminium. Resists impacts up to 200 joules (not pictured).

D. HEEL CAP: 1.8mm resinated synthetic bonded fabric, thermally mouldable, glued to upper (not pictured).

E. SOLE: nitrile rubber, cemented with red wear level indicators. Provides excellent grip even on uneven ground. Heat resistant at 300°C, antistatic, oil and petrol resistant and high wear-resistant.

F. FOOTBED: average 8.0 mm thick composite insole made by a multilayer construction using special antiperforation material (not pictured).

G. THREAD: black Kevlar® Filament - inherently flame-retardant.

H. LACES: black, round Nomex® laces - inherently flame-retardant. Treated to be water repellent.

I. REFLECTORS: yellow, reflex Scotchlite® 3M material.

J. ZIP CLOSURE: Jolly rapid off-system with total opening zipper.

K. ANKLE PROTECTION SYSTEM consisting of heat moulded material combined with a special 3D memory foam padding resulting in high levels of shock absorption.

L. FRONT AND REAR FLEXORS provide improved flexibility and comfort.

M. FRONT PULL ON LOOP

N. REAR PULL-ON LOOP made from reinforced leather to facilitate fast donning

O. ABRASION RESISTANT PROTECTIONS bycast leather. Fitted to the front and rear of each boot.

P. SIDE ANTI-PERFORATION PANELS made from a multilayer fabric, with a perforation resistance of 1100 Newtons (not pictured).

JOLLY SIZING CONVERSION CHART

STANDARD SIZES

EU SIZE	36	37	38	39	40	41	42	43
UK SIZE	3.5	4	5	6	6.5	7	8	9


STANDARD SIZES

SPECIAL

EU SIZE	44	45	46	47	48	49	50	51
UK SIZE	9.5	10	11	12	12.5	13	14	15



SHOE SIZE
[millimeters]

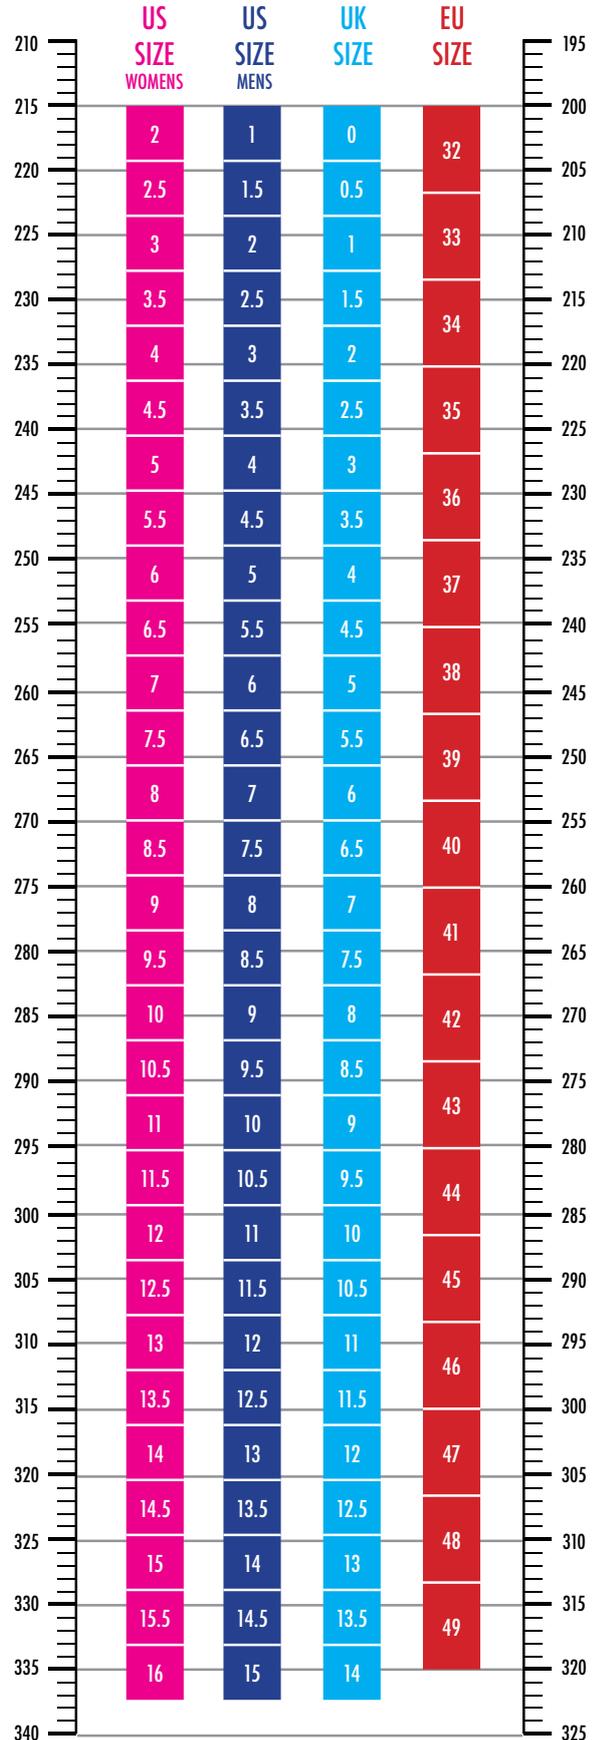

FOOT SIZE
[millimeters]