One Piece Adjustable Mast

Model: DH-3

Description.

The Four Piece Hoist System is designed for manhole and confined space entry/retrieval applications. The DH-3 modular design allows use of components in various configurations and applications. Multiple winches and/or lifeline systems may be mounted as required. Tool-less design breaks the system into lightweight, manageable components for storage, transport, and setup.

Materials

General Construction: Welded Aluminum

Weld Certification: AWS

Hardware: Gr.5, Zinc Plated

Material Structure: 6061-T6, 5052-H32,

7075-T6 Aluminum

Block Anchor: 304 Stainless Steel

Finish: Safety Yellow Powder Coat

Technical.

Rated Capacity: 450lbs (204kg)

Working load limit @ minimum 4:1 Design Factor

Proof Load Ratings

Anchor Points

A) Standard

 Pin Position 1 & 2
 5000lbs (22kN)

 Pin Position 3
 3600lbs (16kN)

 Pin Position 4
 3000lbs (13kN)

 B) Optional
 5000lbs (22kN)

Winch/SRL Mount Positions

A) Rear Mount

 Pin Position 1 & 2
 5000lbs (22kN)

 Pin Position 3
 3600lbs (16kN)

 Pin Position 4
 3000lbs (13kN)

 B) Front Mount

Din Decision 4.9.0

Pin Position 1 & 2 2500lbs (11kN) Pin Position 3 & 4 1800lbs (8kN)

Weight 29lbs (13kg)




Application Restrictions-

- All winch and block mounting parts and hardware must be supplied or approved by Miller.
- Retractable devices or shock absorbers must be installed and used in accordance with the manufacturer's instructions.
- Masts must be used with bases or sleeves approved for use with the applicable mast offset.
- 4. Where required by regulation, each installation must be approved to applicable standards by a qualified engineer.
- All equipment must be set up and operated under the supervision of a competent person according to the manufacturer's instructions.

One Piece Adjustable Mast

Model: DH-3

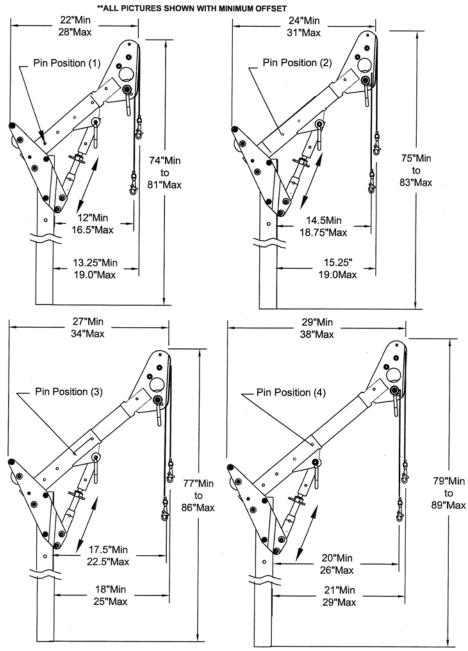

^{*}MAXIMUM OFFSET DETERMINED WITH ADJUSTABLE GUSSET FULLY COLLAPSED (NO VISIBLE THREADS)
*MAXIMUM OFFSET DETERMINED WITH ADJUSTABLE GUSSET FULLY EXTENDED (AS SHOWN IN ALL PICTURES ABOVE)



by Honeywell

Toll Free 800.873.5242 (press 4) • hsptechsupport@honeywell.com • www.millerfallprotection.com

WARNING! THIS DOCUMENT PROVIDES AN OVERVIEW OF FALL PROTECTION PRODUCTS AVAILABLE FROM HONEYWELL AND CARE HAS BEEN TAKEN TO ASSURE THE ACCURACY OF THE DATA. IT DOES NOT PROVIDE IMPORTANT PRODUCT WARNINGS AND INSTRUCTIONS. HONEYWELL RECOMMENDS ALL USERS OF FALL PROTECTION EQUIPMENT UNDERGO THOROUGH TRAINING, AND THAT ALL WARNINGS AND INSTRUCTIONS PROVIDED WITH THE PRODUCTS BE THOROUGHLY READ AND UNDERSTOOD PRIOR TO EACH USE. FAILURE TO READ AND FOLLOW ALL PRODUCT WARNINGS AND INSTRUCTIONS COULD RESULT IN SERIOUS INJURY OR DEATH.